




# EXHAUSTED OIL DRAIN UNITS



OIL DRAIN UNITS

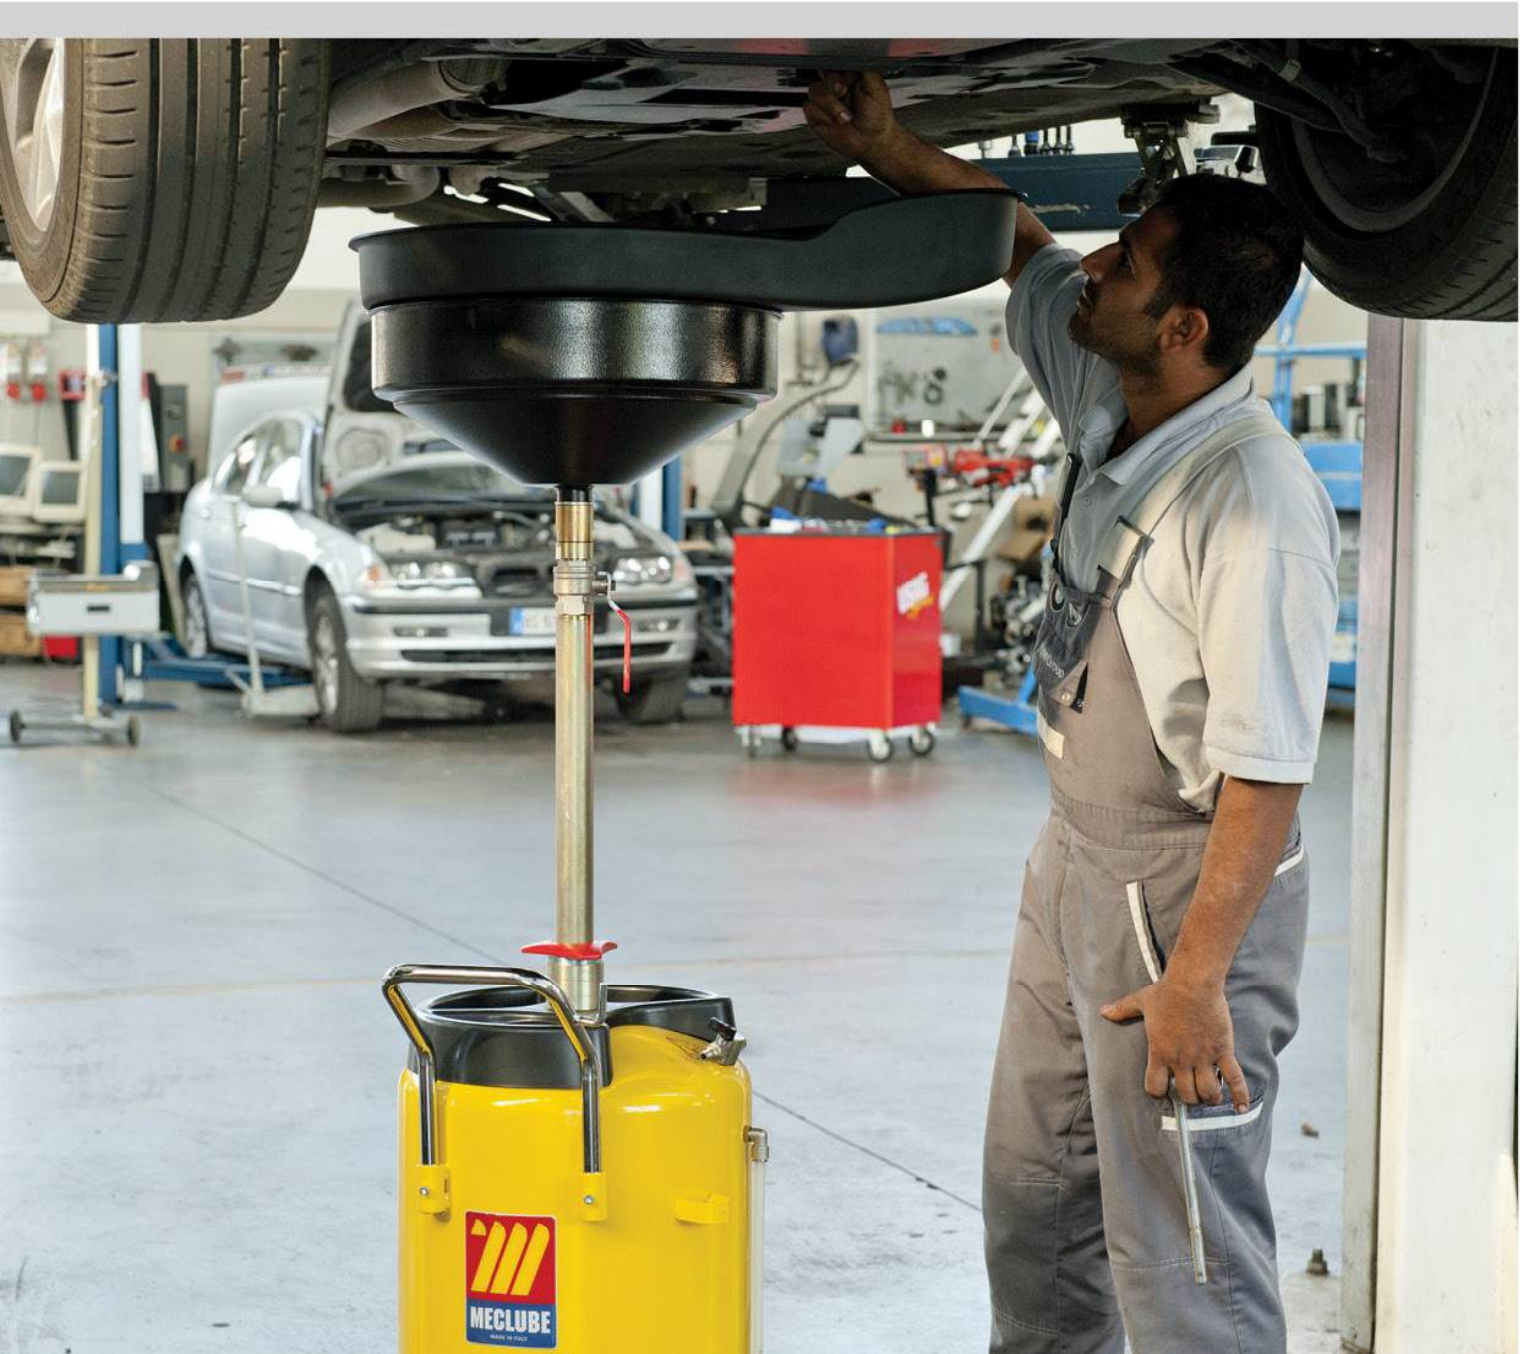

DRAIN UNITS

pg. 136



WHEELED DRAIN UNITS

pg. 137



RECOVERY BASINS

pg. 137



DRAIN UNITS FOR PITS

pg. 138



DRAIN UNITS FOR GROUND

pg. 139



## EXHAUSTED OIL DRAIN UNITS



For the recovery for fall of exhausted oil in the engine, the transmission and the differential of motor-vehicles on the lift bridge.

The basin is equipped with a grate to support for drip the substituted filters, and it can be regulated according to the height.





## EXHAUSTED OIL DRAIN UNITS



045-1462-000

### Art. 045-1462-000

Exhausted oil drain unit 65 l

Tank capacity 65 l with level indicator

Basin abs 3 sections tool holder


Recovery basin capacity 15 l

with breakwater grate for drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)



045-1462-000 26.900 0,220 1



045-1460-000

### Art. 045-1460-000

Exhausted oil drain unit 90 l

Tank capacity 90 l with level indicator

Basin abs 3 sections tool holder

Recovery basin capacity 20 l

with ergonomic and swivel 360° abs funnel

with breakwater grate for drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

### Art. 045-1460-E00

Exhausted oil drain unit 90 l


Composed like Art.045-1460-000 but with:

Recovery basin capacity 15 l



045-1460-000 32.500 0,240 2

045-1460-E00 29.400 0,240 1



045-1465-000

### Art. 045-1465-000

Exhausted oil drain unit 120 l

Tank capacity 120 l with level indicator

Basin abs 3 sections tool holder

Recovery basin capacity 20 l


with ergonomic and swivel 360° abs funnel

with breakwater grate for drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)



045-1465-000 29.500 0,310 2



Technical data		045-1462-000	045-1460-000	045-1460-E00	045-1465-000
Basin dimensions	mm	ø 450	760X705	ø 450	760X705
Minimum height	mm	1000	1200	1200	1200
Maximum height	mm	1700	1850	1850	1850
Emptying hose length	mm	2	2	2	2

For the fall recovery of exhausted oil contained in the engine, the transmission and the differential of motor vehicles on the lift bridge.

The basin is equipped with a grate to support the substituted filters, and it can be regulated according to the height.

**Warning:** It is not possible to recovery brake oils, fuels, inflammable and corrosive liquids.



# WHEELED EXHAUSTED OIL DRAIN UNITS



## Art. 045-1470-000

Wheeled exhausted oil drain unit suitable for drums 50-60 l

Composed by:

Art.030-1395-000 4-wheels trolley


Art.049-1477-000 Metal basin 15 l

with breakwater grate for drip the substituted oil filters

Art.025-1260-000 2" G threaded ring for drum connection



045-1470-000 18,500 0,111 2



045-1470-000

## Art. 045-1475-000

Wheeled exhausted oil drain unit suitable for barrels 180-220 l

Composed by:

Art.030-1400-000 4-wheels trolley

Art.049-1478-000 Metal basin 20 l


with ergonomic and swivel 360° abs funnel

with breakwater grate for drip the substituted oil filters

Art.025-1262-000 2" G threaded ring for drum connection



045-1475-000 45,000 0,209 2



049-1475-000

## Art. 049-1477-000

15 l recovery basin

Composed by:

Metal basin 15 l

with breakwater grate for drip the substituted oil filters

Ø 30 L 750 mm hose with 3/4" G valve

2" G threaded ring for drum connection

## Art. 049-1478-000

20 l recovery basin

Composed by:

Metal basin 20 l

with ergonomic and swivel 360° abs funnel

with breakwater grate for drip the substituted oil filters


Ø 42 L 750 mm hose with 1" G valve

2" G threaded ring for drum connection



049-1477-000 4,910 0,049 2

049-1478-000 7,980 0,052 2

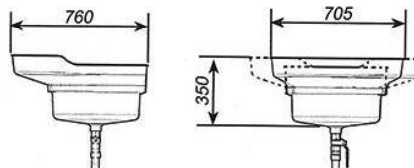

049-1477-000



049-1478-000

OIL DRAIN UNITS

For the full recovery of exhausted oil contained in the engine, the transmission and the differential of motor vehicles on the lift bridge.

The basin is equipped with a grate to support the substituted filters, and it can be regulated according to the height.

**Warning:** It is not possible to recovery brake oils, fuels, inflammable and corrosive liquids.



## EXHAUSTED OIL DRAIN UNITS FOR PITS



046-1457-000

### Art. 046-1457-000

Exhausted oil drain unit for pits 90 l

Tank capacity 90 l

Equipped with:

Breakwater grate on the base of the tank


Breakwater grate for drip the substituted oil filters

Adjustable wheeled supports (min 800 – max 1200 mm)

F 3/4" G exhaust ball valve



046-1457-000 35,500 0,152 1



046-1457-G00

### Art. 046-1457-G00

Exhausted oil drain unit for pits 120 l

Tank capacity 120 l

Equipped with:

Breakwater grate on the base of the tank

Breakwater grate for drip the substituted oil filters

Adjustable wheeled supports (min 800 – max 1200 mm)

F 3/4" exhaust ball valve



046-1457-G00 36,200 0,234 1



046-1457-GP0

### Art. 046-1457-GP0

Exhausted oil drain unit for pits 120 l

With emptying pump

Tank capacity 120 l

Equipped with:

Art.020-1165-000 Air-operated oil pump ratio=1:1

Breakwater grate on the base of the tank

Breakwater grate for drip the substituted oil filters

Adjustable wheeled supports (min 800 – max 1200 mm)

F 3/4" G exhaust ball valve

Art.F96-0500-004 Female quick disconnect coupling 1/2" G

Art.F96-0502-004 Male quick disconnect coupling 1/2" G



046-1457-GP0 42,700 0,234 1



Exhausted oil drain units suitable for the full recovery of motor oils, transmissions and differential gears of lorries on pits. The tank is equipped with breakwater and anti-reflux grate ideal for the support for drip the substituted oil filters. The recovery exhausted oil can be transfer from the recovery basin to the tank of stocking through an emptying pump connected to the fix system or directly mounted on the tank.



# WHEELED EXHAUSTED OIL DRAIN UNITS FOR FLOOR



## Art. 047-1459-000

Wheeled exhausted oil drain unit 60 l

Tank capacity 60 l

Equipped with:

Breakwater grate on the base of the tank

Breakwater grate for drip the substituted oil filters

2 swiveling wheels Ø 80 mm

2 fixed wheels Ø 100 mm


F 3/4" G exhaust ball valve



047-1459-000



047-1459-000 34,100 0,145 1



## Art. 047-1459-G00

Wheeled exhausted oil drain unit 120 l

Tank capacity 120 l

Equipped with:

Breakwater grate on the base of the tank

Breakwater grate for drip the substituted oil filters

2 swiveling wheels Ø 80 mm

2 fixed wheels Ø 100 mm


F 3/4" G exhaust ball valve



047-1459-G00



047-1459-G00 38,200 0,203 1



## Art. 047-1459-GP0

Wheeled exhausted oil drain unit 120 l

With emptying pump

Tank capacity 120 l

Equipped with:

Art.020-1165-000 Air-operated oil pump ratio=1:1

Breakwater grate on the base of the tank

Breakwater grate for drip the substituted oil filters

2 swiveling wheels Ø 80 mm

2 fixed wheels Ø 100 mm

F 3/4" G exhaust ball valve

Art.F96-0500-004 Female quick disconnect coupling 1/2" G


Art.F96-0502-004 Male quick disconnect coupling 1/2" G



047-1459-GP0



047-1459-GP0 44,700 0,203 1



Exhausted oil wheeled drain units for floor suitable for the fall recovery of motor oils, transmissions and differential gears of lorries.

The tank is equipped with breakwater and anti-reflux grate ideal for the support for drip the substituted oil filters.

The recovery exhausted oil can be transfer from the recovery basin to the tank of stocking through an emptying pump connected to the fix system or directly mounted on the tank.

