



# EXHAUSTED OIL ASPIRATORS

OIL ASPIRATORS





AIR-OPERATED OIL ASPIRATORS

pg. 119



AIR-OPERATED ASPIRATORS AND DRAIN UNITS

pg. 121




AIR-OPERATED ASPIRATORS AND DRAIN UNITS WITH PANTOGRAPH

pg. 124



WHEELED ASPIRATORS WITH PUMP

pg. 128



WALL-FIXING ASPIRATORS WITH PUMP

pg. 129



ASPIRATORS WITH DIAPHRAGM PUMP

pg. 130

PROBES FOR OIL ASPIRATORS

pg. 131

The air-operated oil aspirators are ideal for a rapid changing of motor oil to each vehicles. After depressurization have an self-regulating working without the necessity of continue connection of compress air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suck till 2/3 of their capacity.


Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

**Warning:** do not use these units for the suction of brake oils, fuels and inflammable liquids

## Art. 040-1418-000

Air-operated exhausted oil aspirator 24 l  
 Tank capacity 24 l with level indicator  
 Manual air emptying of tank  
 Equipped with 10 standard probes (Art.044-1479-000)

040-1418-000	12,740	0,081	1




040-1418-000

## Art. 040-1420-000

Air-operated exhausted oil aspirator 24 l  
 Tank capacity 24 l with level indicator  
 Manual air emptying of tank (max pressure 0,5 bar)  
 Equipped with 10 standard probes (Art.044-1479-000)

040-1420-000	13,520	0,074	1




040-1420-000

## Art. 040-1427-000

Industrial air-operated aspirator for liquids 90 l  
 Tank capacity 90 l with level indicator  
 3 sections ABS basin with tools holder  
 Pneumatic air emptying of tank (max pressure 0,5 bar)  
 Equipped with 2 probes Ø 12 and Ø 20mm  
 Suction capacity 25 l/min

040-1427-000	27,000	0,240	1



040-1427-000

Technical data		040-1418-000	040-1420-000	040-1427-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8	7,5 - 8
Depressurisation time	l/min	1' - 1,5'	1' - 1,5'	2,5' - 3'
Max suction capacity with a depressurisation	l	13 - 16	13 - 16	60 - 65
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2	2

The air-operated oil aspirators are ideal for a rapid changing of motor oil to each vehicles. After depressurization have an self-regulating working without the necessity of continue connection of compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suck till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80 °C (when the engine is just switched off).

**Warning:** It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.



## AIR-OPERATED ASPIRATORS FOR EXHAUSTED OIL



040-1424-000

### Art. 040-1424-000

Air-operated exhausted oil aspirator 65 l

Tank capacity 65 l with level indicator


Basin abs 3 sections tool holder

Pneumatic air emptying of tank (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



040-1424-000 25,400 0,220 1



040-1425-000

### Art. 040-1425-000

Air-operated exhausted oil aspirator 90 l

Tank capacity 90 l with level indicator


Basin abs 3 sections tool holder

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



040-1425-000 28,900 0,240 1



040-1428-000

### Art. 040-1428-000

Air-operated exhausted oil aspirator 120 l

Tank capacity 120 l with level indicator


Basin abs 3 sections tool holder

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



040-1428-000 26,700 0,310 1



Technical data		040-1424-000	040-1425-000	040-1428-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'	3' - 3,5'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65	85 - 90
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2	2

The air-operated oil aspirators are ideal for a rapid changing of motor oil to each vehicles.

After depressurization have an self-regulating working without the necessity of continue connection of compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes.

The units can suck till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).


**Warning:** It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.

## Art. 040-1430-000

Air-operated oil suction-drainer for exhausted oil 65 l  
 Tank capacity 65 l with level indicator  
 Basin abs 3 sections tool holder  
 Recovery basin capacity 15 l  
 with breakwater grate for drip the substituted oil filters  
 Pneumatic air emptying (max pressure 0,5 bar)  
 Equipped with 10 standard probes (Art.044-1479-000)



040-1430-000 30,080 0,240 1




040-1430-000

## Art. 040-1432-000

Air-operated oil suction-drainer for exhausted oil 90 l  
 Tank capacity 90 l with level indicator  
 Basin abs 3 sections tool holder  
 Recovery basin capacity 20 l  
 with ergonomic and swivel 360° abs funnel  
 with breakwater grate for drip the substituted oil filters  
 Pneumatic air emptying (max pressure 0,5 bar)  
 Equipped with 10 standard probes (Art.044-1479-000)



040-1432-000 36,700 0,240 1




040-1432-000

## Art. 040-1433-000

Air-operated oil suction-drainer for exhausted oil 120 l  
 Tank capacity 120 l with level indicator  
 Basin abs 3 sections tool holder  
 Recovery basin capacity 20 l  
 with ergonomic and swivel 360° abs funnel  
 with breakwater grate for drip the substituted oil filters  
 Pneumatic air emptying (max pressure 0,5 bar)  
 Equipped with 10 standard probes (Art. 044-1479-000)



040-1433-000 33,800 0,310 1



040-1433-000

Technical data		040-1430-000	040-1432-000	040-1433-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'	3' - 3,5'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65	85 - 90
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2	2

The air-operated oil suction drainers are ideal for a rapid changing of motor oil to each vehicles. The recovery of the exhausted oil happen for fall, through the lateral basin adjustable for height, and also for aspiration through the probes.

After depressurization have an self-regulating working without the necessity of continue connection of compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suck till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

**Warning:** It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.



## AIR-OPERATED ASPIRATORS FOR EXHAUSTED OIL WITH PRE-CHAMBER



040-1434-000



040-1435-000



040-1438-000

### Art. 040-1434-000

Air-operated aspirator for exhausted oil 65 l with pre-chamber

Tank capacity 65 l with level indicator

Basin abs 3 sections tool holder


Pre-chamber capacity 10 l

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



040-1434-000 30,320 0,240 2



### Art. 040-1435-000

Air-operated aspirator for exhausted oil 90 l with pre-chamber

Tank capacity 90 l with level indicator

Basin abs 3 sections tool holder

Pre-chamber capacity 10 l

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



040-1435-000 33,100 0,290 2



### Art. 040-1438-000

Air-operated aspirator for exhausted oil 120 l with pre-chamber

Tank capacity 120 l with level indicator

Basin abs 3 sections tool holder


Pre-chamber capacity 10 l

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



040-1438-000 31,150 0,310 2



Technical data		040-1434-000	040-1435-000	040-1438-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'	3' - 3,5'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65	85 - 90
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2	2

The air-operated oil aspirators are ideal for a rapid changing of motor oil to each vehicles.

After depressurization have an self-regulating working without the necessity of continue connection of compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes.

The units can suck till 2/3 of their capacity.

The pre-chamber permit the immediately control of quantity and quality of the aspirated oil, is equipped with a device for the internal cleaning.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

**Warning:** It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.

# AIR-OPERATED SUCTION-DRAINERS FOR EXHAUSTED OIL WITH PRE-CHAMBER



## Art. 040-1442-000

Air-operated suction-drainer for exhausted oil 65 l with pre-chamber

Tank capacity 65 l with level indicator

Basin abs 3 sections tool holder

Pre-chamber capacity 10 l

Recovery basin capacity 15 l


with breakwater grate for drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



040-1442-000 34,290 0,290 2



040-1442-000

## Art. 040-1445-000

Air-operated suction-drainer for exhausted oil 90 l with pre-chamber

Tank capacity 90 l with level indicator

Basin abs 3 sections tool holder

Pre-chamber capacity 10 l

Recovery basin capacity 20 l

with ergonomic and swivel 360° abs funnel


with breakwater grate for drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



040-1445-000 40,600 0,290 2



040-1445-000

## Art. 040-1448-000

Air-operated suction-drainer for exhausted oil 120 l with pre-chamber

Tank capacity 120 l with level indicator

Basin abs 3 sections tool holder

Pre-chamber capacity 10 l

Recovery basin capacity 20 l

with ergonomic and swivel 360° abs funnel


with breakwater grate for drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



040-1448-000 38,300 0,360 2



040-1448-000

Technical data		040-1442-000	040-1445-000	040-1448-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'	3' - 3,5'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65	85 - 90
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2	2

The air-operated oil suction drainers are ideal for a rapid changing of motor oil to each vehicles.

The recovery of the exhausted oil happen for fall, through the lateral basin adjustable for height, and also for aspiration through the probes. After depressurization have an self-regulating working without the necessity of continue connection of compressed air, for an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suck till 2/3 of their capacity.

The pre-chamber permit the immediately control of quantity and quality of the aspirated oil, is equipped with a device for the internal cleaning.

Change the oil at a temperature of 60° - 80 °C (when the engine is just switched off).

Warning: It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.



# AIR OPERATED ASPIRATORS-SUCTION DRAINER FOR EXHAUSTED OIL WITH PANTOGRAPH FOR CAR-MOTOR CYCLES



041-1449-000


## Art. 041-1449-000

Exhausted oil drain units with pantograph 65 l  
For MOTOR CYCLES

Tank capacity 65 l with level indicator  
Basin abs 3 sections tool holder  
Recovery basin capacity 14 l on arms pantograph  
with breakwater grate for drip the substituted oil filters  
Pneumatic air emptying (max pressure 0,5 bar)  
Is not equipped with aspiration group and probes



041-1449-000 38,000 0,450 1

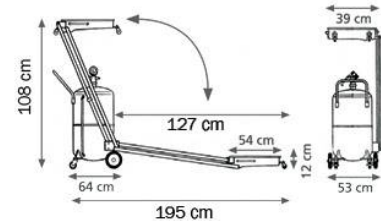

041-1451-000


## Art. 041-1451-000

Exhausted oil aspirators-suction drainer with pantograph 65 l  
For CAR-MOTOR CYCLES

Tank capacity 65 l with level indicator  
Basin abs 3 sections tool holder  
Recovery basin capacity 14 l on arms pantograph  
with breakwater grate for drip the substituted oil filters  
Pneumatic air emptying (max pressure 0,5 bar)  
Equipped with 10 standard probes (Art.044-1479-000)



041-1451-000 41,500 0,450 1

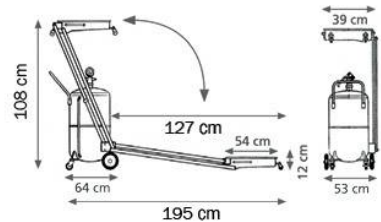

Technical data		041-1449-000	041-1451-000
Air pressure for depressurisation	bar	-	7,5 - 8
Depressurisation time	l/min	-	2' - 2,5'
Max suction capacity with a depressurisation	l	-	43 - 45
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	-	1,5 - 2
Suction hose-emptying - hose length	m	2	2

The air-operated aspirators-suction drainers happen the recovery of the for fall with tank (14 l) on the floor and also lifting for vehicles on auto lift. This operation can be effected also for aspiration, after depressurisation (max 0,7 bar) have an independent working, ideal for a rapid changing of motor oil using the suitable probe between the included kit of 10 probes.

The units can suck till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

**Warning:** It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.



# AIR-OPERATED OIL SUCTION-DRAINERS FOR EXHAUSTED OIL WITH PANTOGRAPH



## Art. 041-1450-000

Air-operated oil suction-drainer with pantograph 65 l  
 Tank capacity 65 l with level indicator  
 Basin abs 3 sections tool holder  
 Recovery basin capacity 14 l on arms pantograph  
 with breakwater grate for drip the substituted oil filters  
 Pneumatic air emptying (max pressure 0,5 bar)  
 Equipped with 10 standard probes (Art.044-1479-000)




041-1450-000



041-1452-000

OIL ASPIRATORS


041-1450-000	42,030	0,450	1

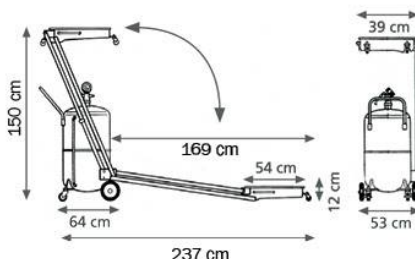

## Art. 041-1452-000

Air-operated oil suction-drainer with pantograph 90 l  
 Tank capacity 90 l with level indicator  
 Basin abs 3 sections tool holder  
 Recovery basin capacity 14 l on arms pantograph  
 with breakwater grate for drip the substituted oil filters  
 Pneumatic air emptying (max pressure 0,5 bar)  
 Equipped with 10 standard probes (Art.044-1479-000)

041-1452-000	44,900	0,450	1

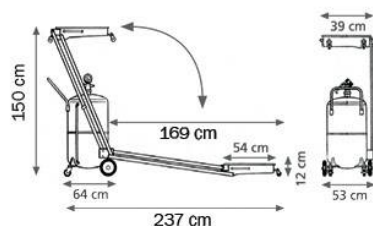

Technical data		041-1450-000	041-1452-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2

The air-operated aspirators-suction drainers happen the recovery of the for fall with tank (14 l) on the floor and also lifting for vehicles on auto lift. This operation can be effected also for aspiration, after depressurisation (max 0,7 bar) have an independent working, ideal for a rapid changing of motor oil using the suitable probe between the included kit of 10 probes.

The units can suck till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80 °C (when the engine is just switched off).

**Warning:** It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.



## AIR-OPERATED OIL SUCTION-DRAINERS FOR EXHAUSTED OIL WITH PANTOGRAPH AND PRE-CHAMBER



041-1454-000

### Art. 041-1454-000

Air-operated exhausted oil suction-drainer with pantograph 65 l and pre-chamber

Tank capacity 65 l with level indicator

Basin abs 3 sections tool holder

Pre-chamber capacity 10 l

Recovery basin capacity 14 l on arms pantograph


with breakwater grate for drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



041-1454-000 45,550 0,450 1

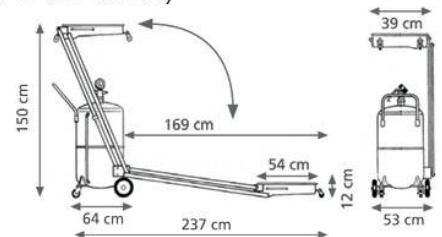

041-1455-000

### Art. 041-1455-000

Air-operated exhausted oil suction-drainer with pantograph 90 l and pre-chamber

Tank capacity 90 l with level indicator

Basin abs 3 sections tool holder

Pre-chamber capacity 10 l

Recovery basin capacity 14 l on arms pantograph


with breakwater grate for drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



041-1455-000 47,240 0,450 1

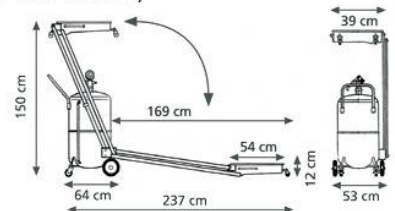

Technical data		041-1454-000	041-1455-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8
Depressurisation time	l/min	2' - 2,5'	2,5' - 3'
Max suction capacity with a depressurisation	l	43 - 45	60 - 65
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2

The air-operated aspirators-suction drainers happen the recovery of the for fall with tank (14 l) on the floor and also lifting for vehicles on lift bridge. This operation can be effected also for aspiration, after depressurization (max 0,7 bar) have an independent working, ideal for a rapid changing of motor oil using the suitable probe between the included kit of 10 probes.

The units can suck till 2/3 of their capacity.

The pre-chamber permit the immediately control of quantity and quality of the aspirated oil, is equipped with a device for the internal cleaning.

Change the oil at a temperature of 60° - 80° C (when the engine is just switched off).

**Warning:** It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.

# AIR-OPERATED OIL SUCTION-DRAINERS FOR EXHAUSTED OIL WITH PANTOGRAPH



## Art. 041-1453-000

Air-operated exhausted oil suction-drainer with pantograph 120 l

Tank capacity 120 l with level indicator

Basin abs 3 sections tool holder

Recovery basin capacity 14 l on arms pantograph

with breakwater grate for drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)




041-1453-000




041-1456-000

OIL ASPIRATORS



041-1453-000 42,800 0,520 1

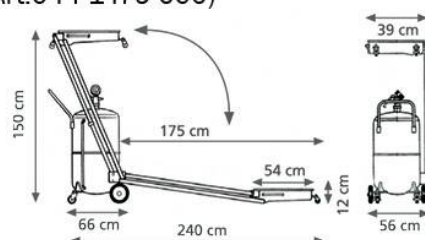

## Art. 041-1456-000

Air-operated exhausted oil suction-drainer with pantograph 120 l

For TRUCKS

Tank capacity 120 l with level indicator

Basin abs 3 sections tool holder

Recovery basin capacity 50 l on arms pantograph


with breakwater grate for drip the substituted oil filters

Pneumatic air emptying (max pressure 0,5 bar)

Equipped with 10 standard probes (Art.044-1479-000)



041-1456-000 52,000 0,650 1

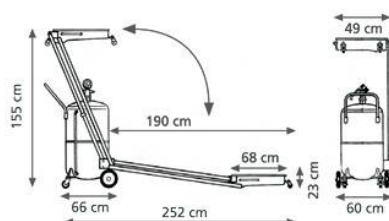

Technical data		041-1453-000	041-1456-000
Air pressure for depressurisation	bar	7,5 - 8	7,5 - 8
Depressurisation time	l/min	3' - 3,5'	3' - 3,5'
Max suction capacity with a depressurisation	l	85 - 90	85 - 90
Suction time with Ø 6 and oil at 60 - 80 °C temperature	l/min	1,5 - 2	1,5 - 2
Suction hose-emptying - hose length	m	2	2

The air-operated aspirators-suction drainers happen the recovery of the for fall with tank (14-50 l) on the floor and also lifting for vehicles on lift bridge. This operation can be effected also for aspiration, after depressurization (max 0,7 bar) have an independent working, ideal for a rapid changing of motor oil using the suitable probe between the included kit of 10 probes.

The units can suck till 2/3 of their capacity.

Change the oil at a temperature of 60° - 80 °C (when the engine is just switched off).

**Warning:** It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.



## WHEELED ASPIRATORS FOR EXHAUSTED OIL WITH PNEUMATIC PUMP



042-1410-000

### Art. 042-1410-000

Wheeled aspirator with pump for drums of 50-60 l

Composed by:

Art.020-1165-000 Air-operated pump ratio=1:1

Equipped with the flux adjuster and the vacuum gauge

Art.030-1395-000 4-wheels trolley

Art.044-1479-000 Set 10 standard probes


2 m aspiration - delivery hoses

Art.024-1232-F00 Oil dispensing nozzle flexible end



042-1410-000 23,200 0,072 1

Ø 370-420 mm



042-1411-000

### Art. 042-1411-000

Wheeled aspirator with pump for barrels of 180-220 l

Composed by:

Art.020-1165-000 Air-operated pump ratio=1:1

Equipped with the flux adjuster and the vacuum gauge

Art.030-1400-000 4-wheels trolley

Art.044-1479-000 Set 10 standard probes


2 m aspiration - delivery hoses

Art.024-1232-F00 Oil dispensing nozzle flexible end



042-1411-000 45,140 0,170 1

Ø 550-600 mm



042-1412-000

### Art. 042-1412-000

Air-operated oil suction-drainer 90 l with pneumatic oil pump

Pneumatic air emptying (max pressure 0,5 bar)

Composed by:

Tank capacity 90 l with level indicator

Art.020-1165-000 Air-operated pump ratio=1:1

Equipped with the flux adjuster and the vacuum gauge

Recovery basin capacity 20 l

with ergonomic and swivel 360° abs funnel


with breakwater grate for drip the substituted oil filters

Art.044-1479-000 Set 10 standard probes

2 m aspiration - delivery hoses



042-1412-000 40,950 0,240 2



Suitable for the aspiration of exhausted oil and similar from every motor vehicle.

When you inverse the position of the two hoses the aspirator can deliver the aspirated fluids.

**Warning:** It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.

# WALL-FIXING ASPIRATORS FOR EXHAUSTED OIL WITH PNEUMATIC PUMP



## Art. 042-1304-000


Wall-fixing aspirator for emptying exhausted oil aspirator/suction-drainer

Composed by:

- Art.020-1168-000 Air-operated pump ratio=1:1
- Equipped with the flux adjuster and the vacuum gauge
- Art.025-1265-000 Wall-fixing bracket
- Art.910-0700-020 Flex hose Ø 25mm 2m
- Art.044-1498-000 Probe Ø 12 mm
- Art.F94-0540-525 Rubber connection M 3/4" Ø 25mm
- Art.F96-0500-005 Quick disconnect coupling female 3/4"
- Art.F96-0502-005 Quick disconnect coupling male 3/4"



042-1304-000 23,200 0,072 1



042-1304-000

## Art. 042-1413-000


Wall-fixing aspirator for exhausted oil with pump

Composed by:

- Art.020-1168-000 Air-operated pump ratio=1:1
- Equipped with the flux adjuster and the vacuum gauge
- Art.025-1265-000 Wall-fixing bracket
- Art.044-1479-000 Set 10 standard probes
- Art.044-1498-000 Probe Ø 12 mm
- Art.044-1505-000 Wall-fixing holder for probes
- Art.916-0411-040 spirac 4m aspiration Ø 12 M-M 1/4 - delivery hose
- Art.906-0404-040 R1 1/2" hose M-F 4 m with plastic support
- Art.024-1232-F00 Oil dispensing nozzle flexible end



042-1413-000 11,800 0,031 1



042-1413-000

## Art. 042-1414-000


Wall-fixing aspirator for exhausted oil with pump

Composed by:

- Art.020-1168-000 Air-operated pump ratio=1:1
- Equipped with the flux adjuster and the vacuum gauge
- Art.071-1206-410 Swiveling hose reel with R1 1/2" hose 10m length
- Art.025-1265-000 Wall-fixing bracket
- Art.044-1479-000 Set 10 standard probes
- Art.044-1498-000 Probe Ø 12 mm
- Art.044-1505-000 Wall-fixing holder for probes
- Art.906-0424-015 R1 1/2" hose F-F 1,5m length
- Art.906-0404-040 R1 1/2" hose M-F 4 m with plastic support
- Art.024-1232-F00 Oil dispensing nozzle flexible end



042-1414-000 30,600 0,083 2



042-1414-000

**ATTENTION:** is necessary to loosen the working of the pump through the flux adjuster to maintain the vacuum gauge in the optimal position of - 0,6.

Fixed aspiration systems active by air-operated pump, ideal for the aspiration of exhausted oil and similar from each vehicles, using the suitable probe, between the included kit of 11 probes. Wall-fixing application allow the connection to fix system for the discharge of the aspirated liquid directly to the tank of stocking.

**Warning:** It is not possible to suck brake oils, fuels, inflammable and corrosive liquids



## AIR-OPERATED DIAPHRAGM PUMP FOR EXHAUSTED OIL



042-1415-000

### Art. 042-1415-000

Aspirators with wall-fixing air-operated diaphragm pump for exhausted oil

Composed by:

Art.028-1362-000 Air-op. diaphragm pump ratio=1:1 delivery capacity 61 l/min

Equipped with the flux adjuster and the vacuum gauge

Art.025-1266-000 Wall-fixing bracket

Art.071-1206-410 Swiveling hose reel with R1 1/2" hose 10m length

Art.044-1479-000 Set 10 standard probes

Art.044-1498-000 Probe Ø 12 mm

Art.044-1505-000 Wall-fixing holder for probes


Art.906-0424-015 R1 1/2" hose F-F 1,5m

Art.906-0404-040 R1 1/2" hose M-F 4 m with plastic support

Art.024-1232-F00 Oil dispensing nozzle flexible end



042-1415-000	9,800	0,100	4
--------------	-------	-------	---



042-1416-000

### Art. 042-1416-000

Aspirators support with air-operated diaphragm pump for exhausted oil

Composed by:

Art.023-1968-001 Service support

Art.028-1362-000 Air-op. diaphragm pump ratio=1:1 delivery capacity 61 l/min

Equipped with the flux adjuster and the vacuum gauge

Art.025-1266-000 Wall-fixing bracket

Art.070-1206-410 Swiveling hose reel with R1 1/2" hose 10m length

Art.044-1479-000 Set 10 standard probes

Art.044-1498-000 Probe Ø 12 mm

Art.044-1505-000 Wall-fixing holder for probes

Art.906-0424-015 R1 1/2" hose F-F 1,5m length

Art.906-0404-040 R1 1/2" hose M-F 4 m



042-1416-000	106,800	0,660	4
--------------	---------	-------	---



**ATTENTION:** is necessary to loosen the working of the pump through the flux adjuster to maintain the vacuum gauge in the optimal position of - 0,6.

Fixed aspiration systems active by air-operated pump, ideal for the aspiration of exhausted oil and similar from each vehicles, using the suitable probe, between the included kit of 11 probes.

Wall-fixing application allow the connection to fix system for the discharge of the aspirated liquid directly to the tank of stocking.


**Warning:** It is not possible to suck brake oils, fuels, inflammable and corrosive liquids.

**Art. 044-1479-000**

Set 10 standard probes supplied with the oil aspirators


Composed by:

- Art. 044-1480-000** Connection suitable for Volkswagen – AUDI engine-incorporated probes
  - Art. 044-1481-000** Connection suitable for BMW engine-incorporated probes
  - Art. 044-1481-B00** Connection suitable for JTD – FIAT engine-incorporated probes
  - Art. 044-1481-C00** Connection suitable for Citroën-Peugeot engine-incorporated probes
  - Art. 044-1482-000** Flexible probe Ø 5 mm 800 mm
  - Art. 044-1483-000** Flexible probe Ø 6 mm 800 mm
  - Art. 044-1484-000** Flexible probe Ø 7 mm 1000 mm
  - Art. 044-1485-000** Flexible probe Ø 8 mm 800 mm
  - Art. 044-1488-000** Metallic probe Ø 5 mm 800 mm
  - Art. 044-1489-000** Metallic probe Ø 6 mm 800 mm
- The same probes are available as a single item

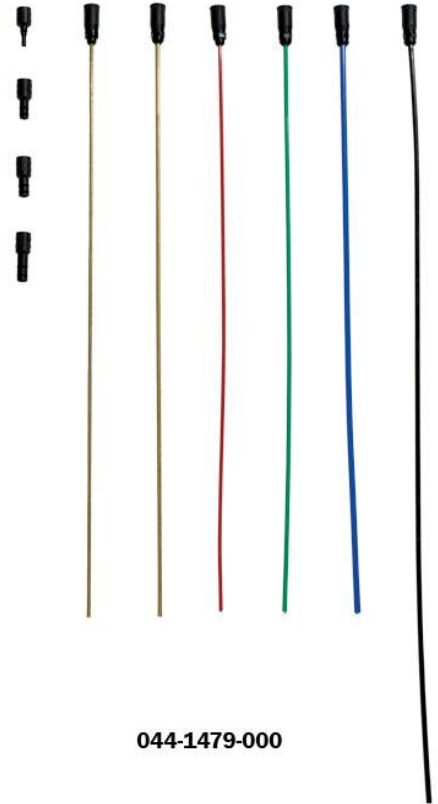

Probes by request

- Art. 044-1490-000** Flexible probe Ø 8 mm 1000 mm
- Art. 044-1491-000** Flexible probe Ø 5 mm 1200 mm
- Art. 044-1492-000** Flexible probe Ø 6 mm 1200 mm
- Art. 044-1493-000** Flexible probe Ø 7 mm 1200 mm
- Art. 044-1494-000** Flexible probe Ø 8 mm 1200 mm
- Art. 044-1497-000** Flexible probe Ø 8 mm 1500 mm
- Art. 044-1498-000** Flexible probe Ø 12 mm 800 mm
- Art. 044-1500-000** STAINLESS STEEL probe Ø 8 mm 800 mm
- Art. 044-1501-000** STAINLESS STEEL probe Ø 10 mm 800 mm
- Art. 044-1502-000** STAINLESS STEEL probe Ø 12 mm 800 mm
- Art. 044-1505-000** Wall-fixing support for probes

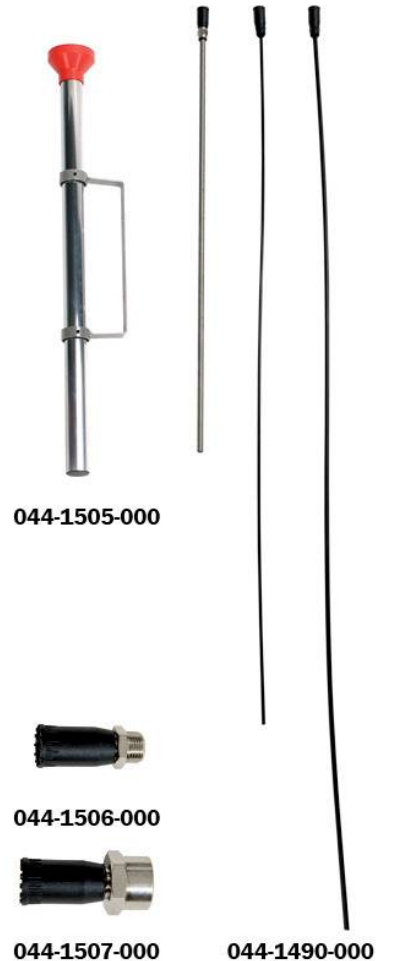

Nautical specific probes

- Art. 044-1506-000** 3/8 connection for nautical motors
- Art. 044-1507-000** 3/4 connection for nautical motors

